



Mini Surface Mount Transformer

Turns Ratio	1CT:1.3CT			
PARAMETER	Min.	Typ.	Max.	Units
Inductance Pins 1 - 3	400			μH
DC Resistance Pins 1 - 3			0.950	Ω
Pins 6 - 4			1.250	Ω
Dielectric Rating Pins 1 - 6	1500			V_{RMS}
ET Product Pins 1-3		27		$V_{\mu\text{sec.}}$

Schematic



Designed for use with Maxim 211/3212 and 218/3218 RS-232 Interface ICs, also suitable for other power applications.

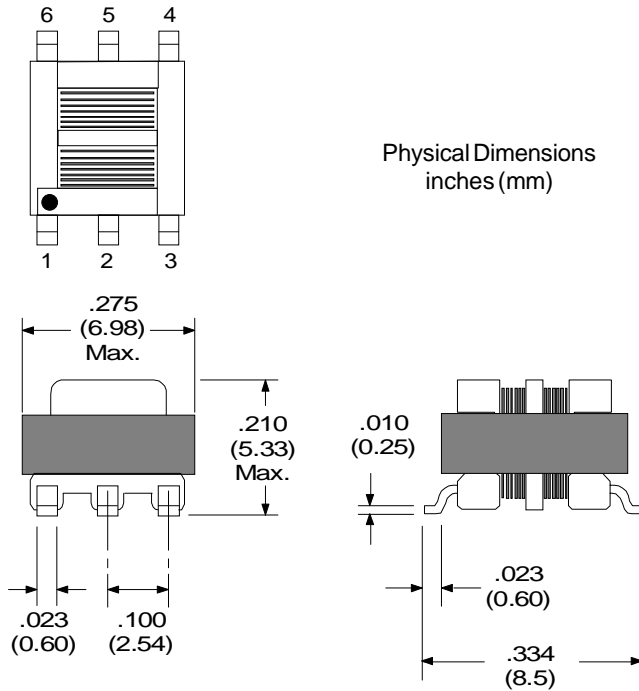

RHOMBUS P/N: **T-1453**

CUST P/N:

NAME:

DATE: **08/17/01**

SHEET: 1 of 1