


PARAMETER		UNITS
Turns Ratio	1 : 1	
Impedance @1 KHz -1 Vrms	pin 5-8 600 pin 1-4 600 ± 15%	$\Omega$ $\Omega$
Primary DC Resistance (1-4)	55 ±10%	$\Omega$
Secondary DC Resistance (5-8)	43 ±10%	$\Omega$
Inductance (1-4) @1KHz, 0.1 Vrms	320 Min	mH
<sup>1</sup> Insertion Loss @ 1KHz - 1Vrms	1 Max	dB
Return loss pins 5-8		
With 600 $\Omega$ load @ 300 Hz	10 Min	dB
@ 1 KHz	15 Min	dB
@ 3400 Hz	18 Min	dB
Isolation (HI-POT) 1-5 (@ 1500 VAC, 1mA, minute)	1500	VAC

<sup>1</sup>Pins 5-8 with 600 $\Omega$  load

Physical Dimensions in inches (mm)

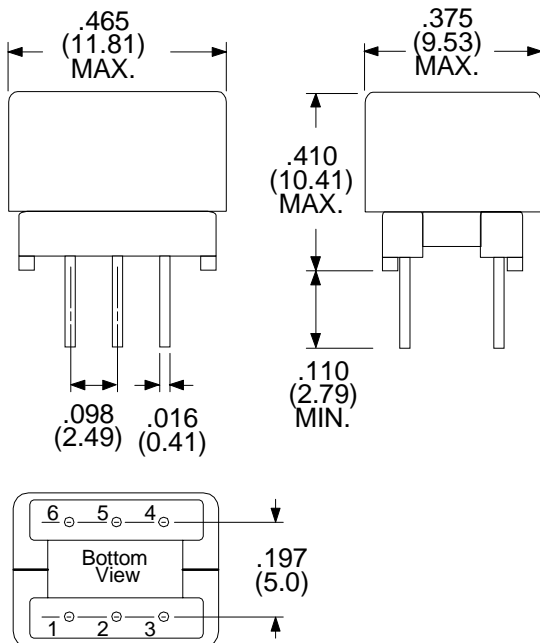


Notch or white dot on bobbin indicates pin #1

# AUDIO Transformer


## 600 $\Omega$

### Part Number T-1487

Schematic Diagram

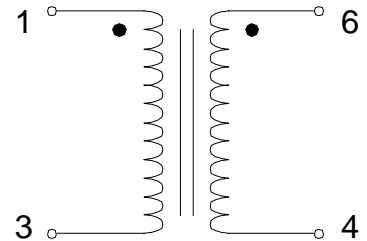


FREQUENCY RESPONSE

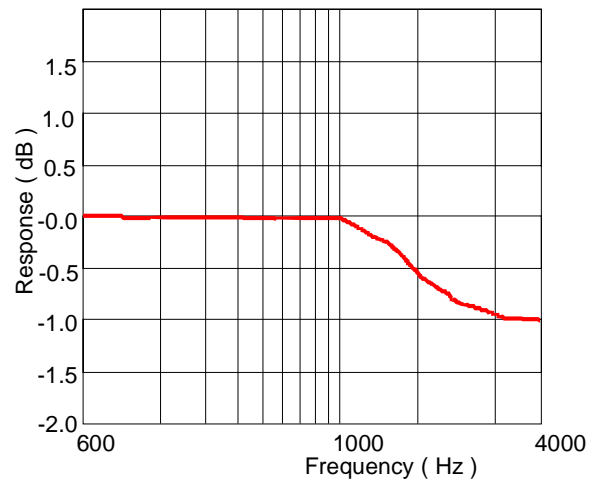

PIN POSITION GRID 0.098 (2.5)

● BOBBIN TERMINATIONS



11/2/00