



# 10/100 BASE-T SINGLE PORT SURFACE MOUNT MAGNETICS

Electrical Specifications at 25°C

CMR (dB typ.) (0.1-100MHz)	Crosstalk (dB min) (0.1-100MHz)	Insertion Loss (dB min) (0.1-100MHz)	Return Loss (dB min)				Cw/W (pF typ)	L <sub>L</sub> (μH max)	DCR (Ω max)	Turns Ratio
			0.5-30MHz	40MHz	50MHz	60-80MHz				
-40	-40	-1.1	-18	-15.5	-13.6	-12	15	0.9	0.9	1.41CT:1CT \ 1CT:1CT


- Designed for reflow soldering at temperatures up to 235°C
- Meets all IEE 802.3 and ANSI X3.263 standards including 350 μH OCL with 8 mA bias
- Tape and Reel available.
- Isolation 1500 V<sub>RMS</sub>

### Dimensions in inches (mm)

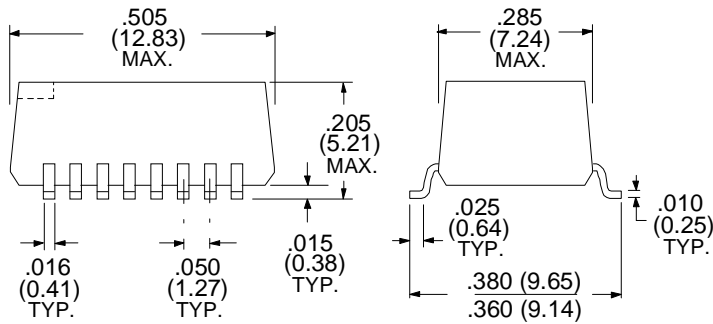

Pin Out

### SCHEMATIC

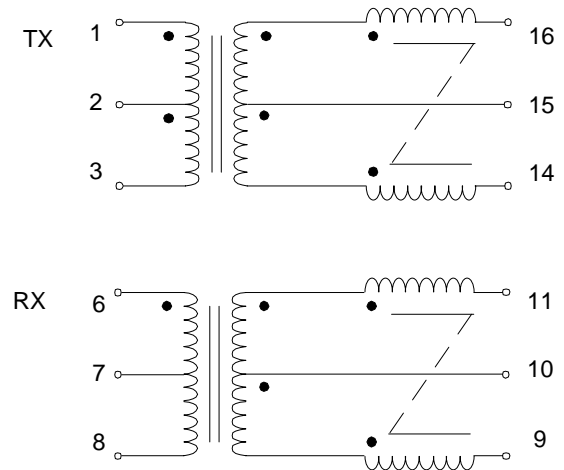

RHOMBUS P/N: **T-17208**

CUST P/N:

NAME:

DATE: **03/21/02**

SHEET: 1 OF 1