

Turns Ratio ( ± 5% )

2:1:1


PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	200		μHy
Leakage Inductance		0.8	μHy
Interwinding Capacitance ( $C_{W/W}$ )		8	pF
Primary DC Resistance		0.9	ohms
Secondary DC Resistance		0.5 & 0.5	ohms
Primary ET-Constant	5		Vμs
Rise Time		3.2	nS
Isolation (HI-POT)	500		V <sub>RMS</sub>
Average Power Rating	500 mW		
Dissipation Rating	150 mW		
Peak Pulse Voltage	100 volts		
Insulation Resistance	10,000 MΩ		
<b>TEST CONDITIONS:</b>			
Oscillation Voltage = 20mV			
Oscillation Frequency = 100.0 KHz TESTED WITH AN H.P. 4192A			

# MULTI-PURPOSE PULSE TRANSFORMER

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 50 pieces per tube

## SCHEMATIC DIAGRAM

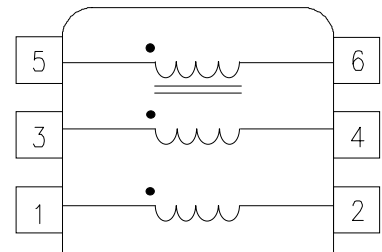

## PHYSICAL DIMENSIONS

All dimensions in inches (mm)

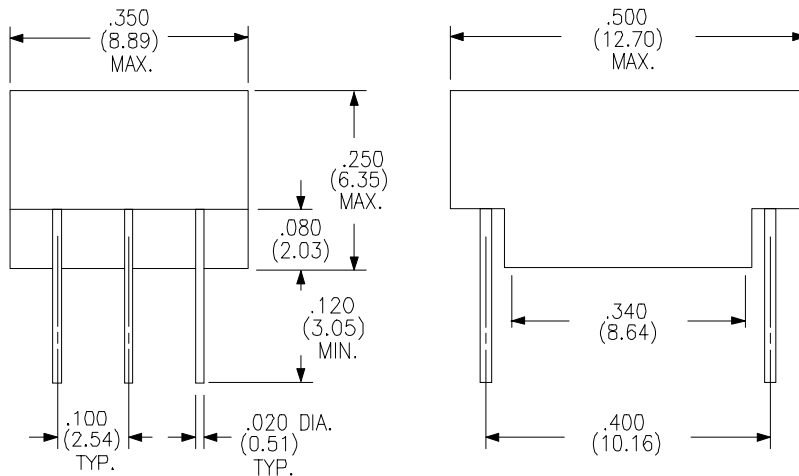RHOMBUS P/N: **T-50134**

CUST P/N:

NAME:

DATE: 07/02/98

SHEET: 1 OF 1