



PARAMETER		UNITS
Primary Impedance	600	Ω
Secondary Impedance	600	Ω
Longitudinal Balance	60dB min. 200 - 4000 Hz	
Primary DC Resistance	68	Ω Max.
Secondary DC Resistance	102	Ω Max.
Frequency Response	± 25 300 - 3000Hz	dB
Insertion Loss	1.0 +0.25dB @ 1kHz	
Isolation (HI-POT)	1100	V _{RMS}
Primary DC	None	
Inductance	700	mH
Return Loss	26dB min @ 1kHz 600 Ω with 470 Ω load on secondary.	

T-531

SCHEMATIC DIAGRAM




Dimensions in inches (mm)

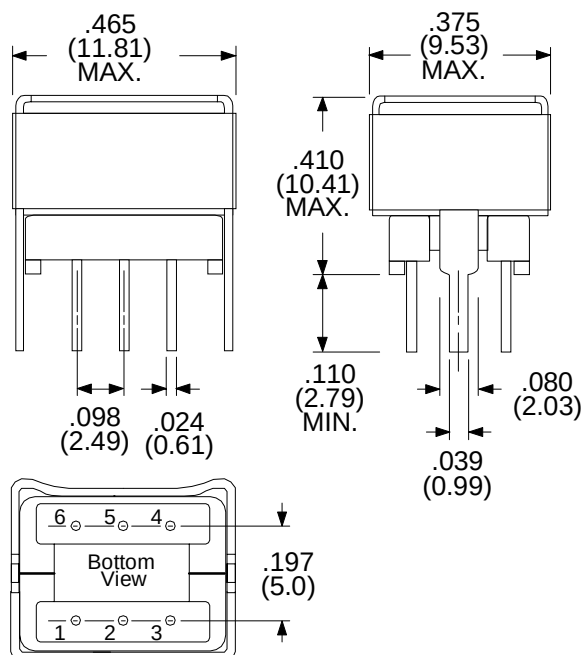

PIN POSITION GRID 0.098 (2.5)

- CLIP SET TERMINATIONS
- BOBBIN TERMINATIONS



RHOMBUS P/N: **T-531**

CUST P/N:

NAME:

DATE: **12/01/00**

SHEET: **1 OF 1**