


PARAMETER		UNITS
Primary Impedance	600	Ω
Secondary Impedance	600	Ω
Primary DC Resistance	65	Ω
Secondary DC Resistance	85	Ω
Maximum Power	+ 7	dBm
DC Current	100	mA
Frequency Response 300 - 3500Hz	± 0.5	dB
Insertion Loss @ 1kHz	2.5	dB
Impedance Matching over entire range	$\pm 0.5 \%$	

HIPOT 1500 V_{RMS}


Schematic Diagram

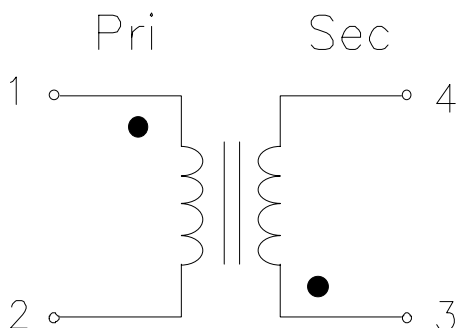

Dot on bobbin indicates Pin #1

Audio Matching Transformer

Physical Dimensions inches (mm)

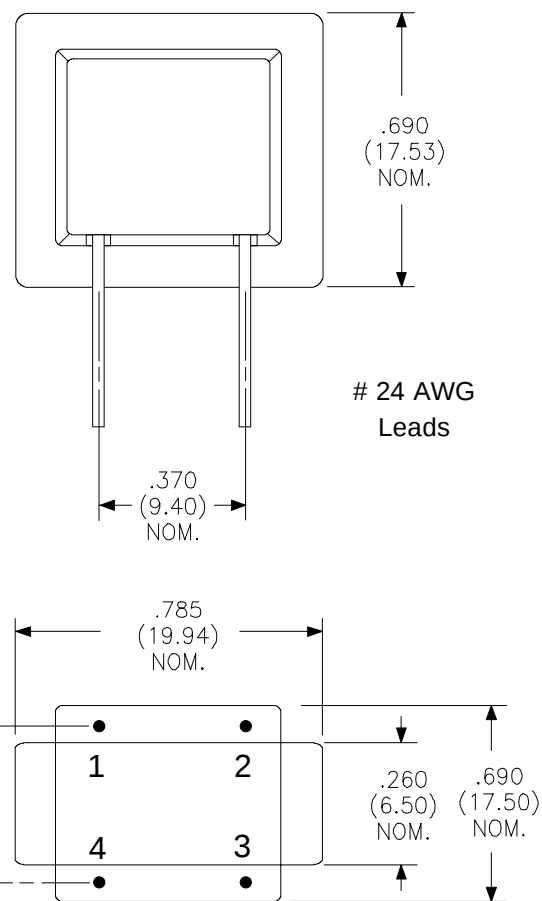

Bottom View

Rhombus P/N: **T-599**

Cust. P/N:

Name:

Date: **12/07/94**

Sheet: 1 of 1



**Rhombus
Industries Inc.**
Transformers & Magnetic Products

FSCM
No. 16714

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971