


# Low Profile PC Power Transformer

PARAMETER		UNITS
<b>Power Rating</b>	30	VA
<b>Secondary Ratings</b> <b>Series Connected</b> 2-3 & 6-7 (Input 220V Primary 50 Hz)	110 ± 5% 272.7	V mA
<b>Secondary Ratings</b> <b>Parallel Connected</b> 1-3 & 2-4 / 5-7 & 6-8 (Input 110V Primary 60 Hz)	55 ± 5% 545.4	V mA
<b>DCR Primary</b> (pins 1-2 or 3-4)	61 Typ.	Ω
<b>DCR Secondary</b> (pins 5-6 or 7-8)	15 Typ.	Ω
<b>Isolation</b> 1,2,3,4 to 5,6,7,8	1500 min.	V <sub>RMS</sub>

Schematic Diagram

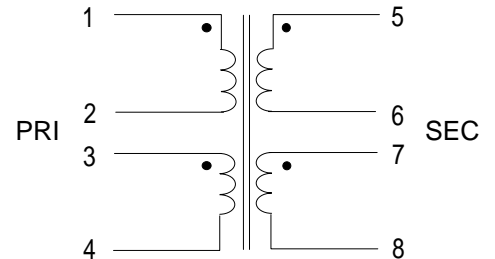


SEE BOTTOM VIEW FOR PIN OUT

Parallel External  
Connections:  
1-3, 2-4 & 5-7, 6-8


Series External  
Connections:  
2-3 & 6-7

Manufactured with UL Listed materials.

Physical Dimensions  
inches (mm)

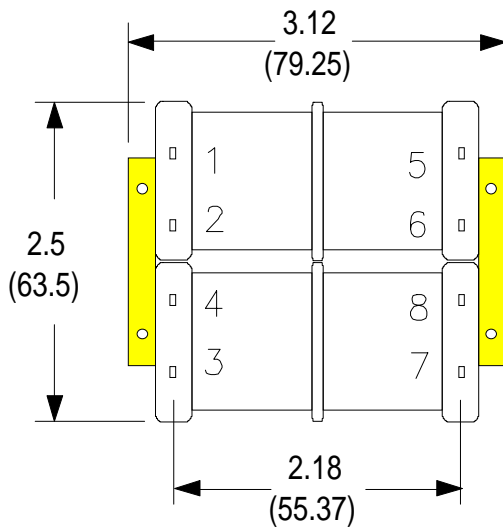

Bottom View

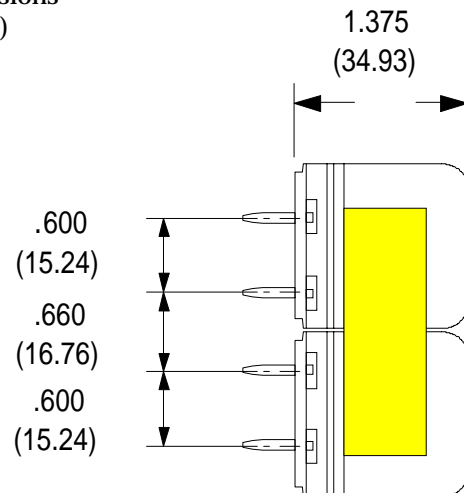

Side View

## T-60366

12/15/95