



PARAMETER		UNITS
Impedance Primary /Secondary	20K/600	Ω
Primary DC Resistance	526	Ω
Secondary DC Resistance	112	Ω
DC Current	0	mA
Frequency Response 300 - 3500Hz	± 2.5	dB
Insertion Loss @ 1kHz	2.5	dB
Isolation (min)	1500	V _{rms}

Audio Matching Transformer

Schematic Diagram

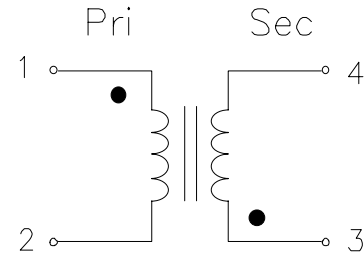

Physical Dimensions inches (mm)

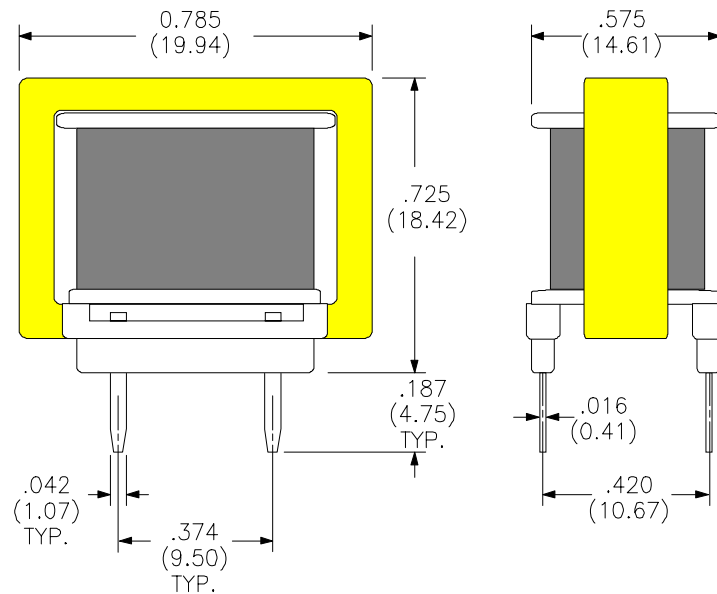

Rhombus P/N: **T-733**

Cust. P/N:

Name:

Date: **9/17/96**

Sheet: 1 of 1