


Digital Audio Transformer

T-881

Turns Ratio (± 2%)	1:1
----------------------	-----

PARAMETER	MIN.	MAX.	UNITS
¹ Open Circuit Inductance	225		μHy
² Leakage Inductance		0.4	μHy
² Interwinding Capacitance (C _{W/W})		15	pF
DC Resistance (any winding)		0.1	ohms
Isolation (HI-POT)	1500		V _{RMS}

TEST CONDITIONS:
¹Oscillation Voltage = 100mV
 Oscillation Frequency = 10.0 KHz
²Oscillation Frequency = 100.0 KHz
 Oscillation Voltage = 100mV

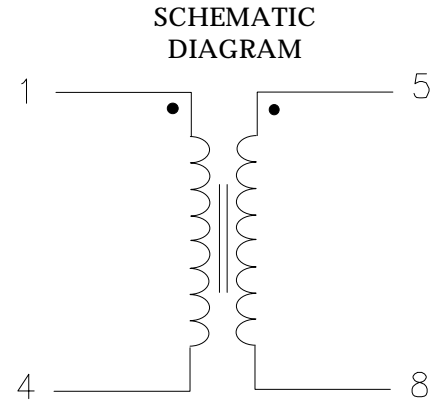


Parts shipped in anti-static tubes. 50 pieces per tube

Tape & Reel Available

Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.

PHYSICAL DIMENSIONS inches (mm)

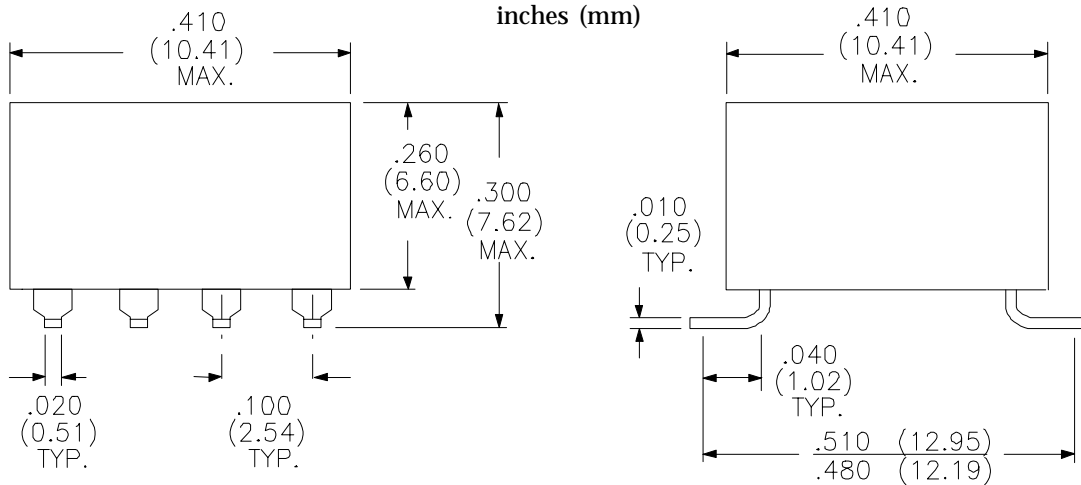

RHOMBUS P/N: T-881	
CUST P/N:	NAME:
DATE: 11/28/96	SHEET: 1 OF 1