




PARAMETER		UNITS
Turns Ratio Pins 1-5 : 6-7 : 9-10	1 : 0.5 : 0.5 ± 2%	
Inductance ⁽¹⁾ (Min)	12	mH
Leakage Inductance ⁽²⁾	30	μH
Interwinding Capacitance	26	pF
DCR Pins 1 - 5 (Max)	4.00	Ω
DCR Pins 6-7 + 9-10 (Max)	4.20	Ω
ET (Min)	200	V-μS
Isolation (min) (1 - 5) to(6-7 & 9-10)	2800	V _{RMS}
Bandwidth	3kHz to 1 MHz	

1) Tested @ 10 kHz and 100mV

2) Tested @ 10 kHz and 100mV
(Pins 1-5 short 6+7+9+10)

PULSE TRANSFORMER


Schematic Diagram

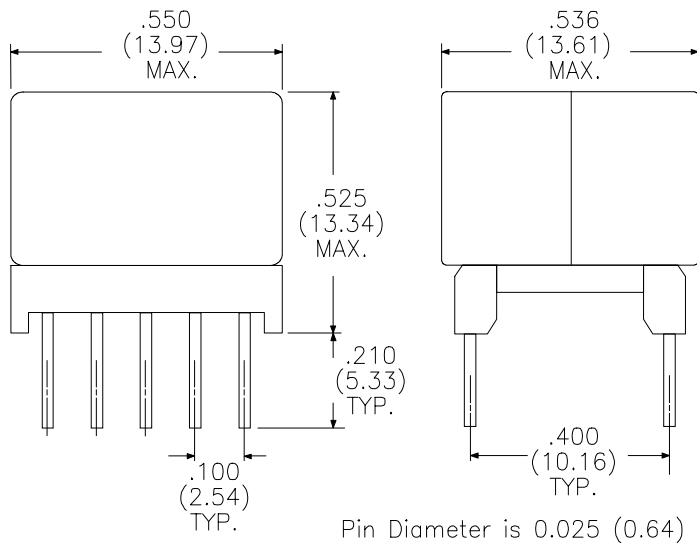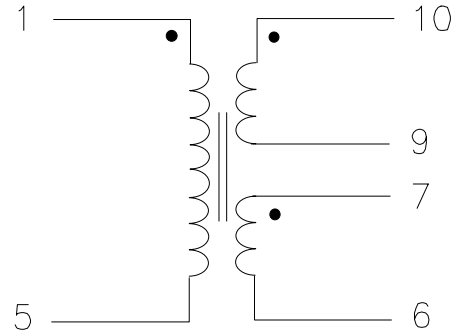

Physical Dimensions inches (mm)

PIN POSITION GRID 0.100 (2.54)

● HOLES FOR BOBBIN PINS

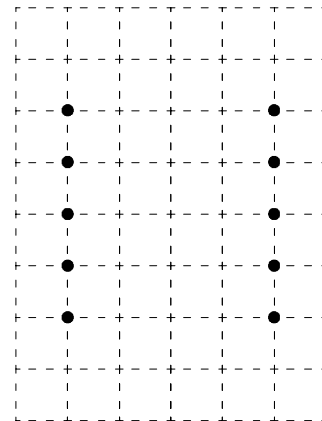

Rhombus P/N: **T-969**

Cust. P/N:

Name:

Date: **9/5/97**

Sheet: 1 of 1