

PARAMETER		UNITS
Turns Ratio	2 : 1 $\pm 1\%$	
Line Impedance	135	Ω
Inductance (Line Side)	3.5 $\pm 6\%$	mH
Longitudinal Balance 40 kHz to 200 kHz	53 min.	dB
Primary DC Resistance	2.5 Max.	Ω
Secondary DC Resistance	1.0 Max.	Ω
Frequency Response 40kHz - 300kHz	± 0.2	dB
Insertion Loss @ 200kHz	0.4	dB
Isolation (HI-POT)	1500	V _{RMS}
Primary DC	60	mA
Return Loss @ 40kHz	17 min.	dB
THD (40 KHz, 14 dBm)	-70 Min.	dB

T-983

HDSL

TRANSFORMER


Designed for HDSL applications

Compatible with Brooktree BT8960 at 416 kbps


Custom versions of this transformer are available.

A Surface Mount version of this transformer is available

SCHEMATIC DIAGRAM:




Line Side Pins 1-4 + 2-5
Device Side Pins 9-7

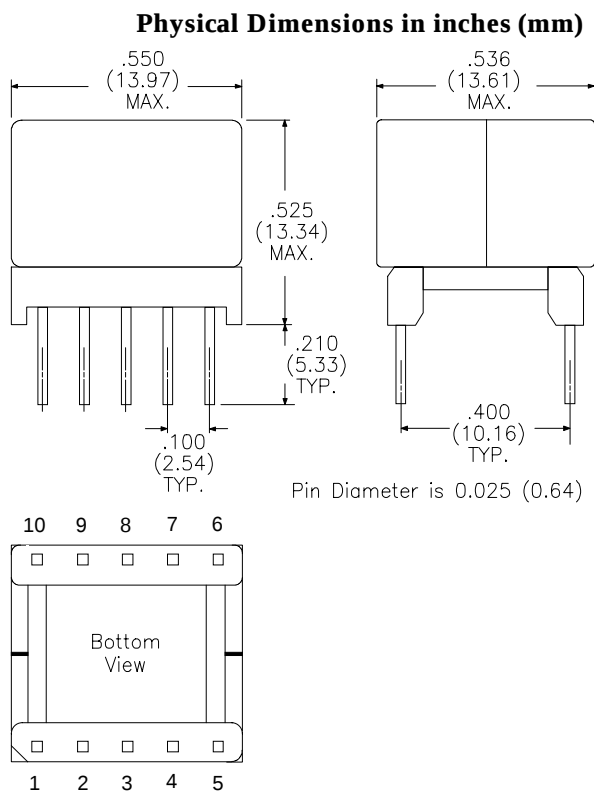

PIN POSITION GRID 0.100 (2.54)

● HOLES FOR BOBBIN PINS

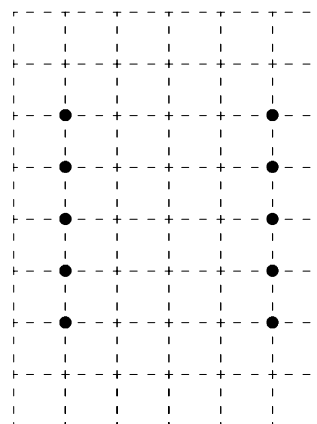

1/22/96