
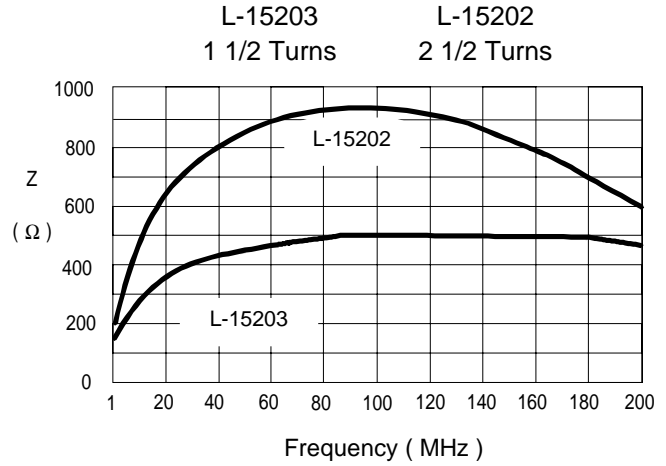


Bead Inductors

Designed for use in attenuating EMI and other unwanted High Frequency Noise without contributing to Power Loss.

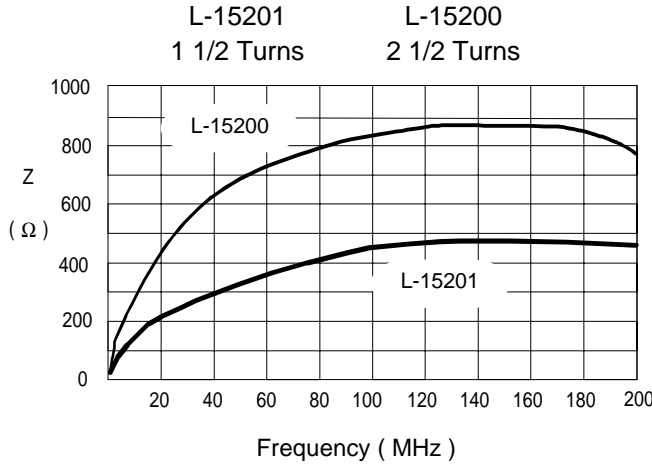

Impedance graphs are for typical response over frequency
Electrical variations of the above part numbers are available.
Lead Wire is #24 AWG tinned copper -- Mounting available.


Nominal Package Dimensions		
Outside Diameter	Body Length	Lead Length
.236"	.394"	.394"

Air Coils & Bobbins

Rhombus manufactures air coils and Bobbins for a variety of applications. Please fax us your requirements for an immediate quote.

Applications Include

- Satellite Communications Microwave Equipment
- Broadcast TV Test Equipment AM/FM Radio
- Receivers/Transmitters Scanners Cable TV Systems



Mechanical

- Clockwise & Counter Clockwise windings.
- Inside Coil Diameters .100" to .500"
- Temperature Range 130° to 220° C
- Wire gauges #12 to #32 AWG
- Variable pitch available
- Coil lengths up to 2.0"

