

# Surface Mount Toroidal Inductors

Designed for filter applications  
with low ET values



Toroid mount meets UL94VO

Designed for IR and  
Vapor Phase Reflow Systems

Built using Powdered Iron material.

Sendust and MPP materials are  
available, contact the factory.

Part Number	L ± 15% ( $\mu$ H)	DCR Max. (m $\Omega$ )	I Max. (100 CM/A) (Amps)	Size Code
L-15000	7.0	73	1.0	1
L-15001	3.4	37	1.6	1
L-15002	1.8	20	2.5	1
L-15003	0.9	12	4.0	1
L-15004	20.7	102	1.4	2
L-15005	14.4	52	2.2	2
L-15006	9.2	28	3.5	2
L-15007	5.2	17	5.6	2
L-15008	39.6	130	1.6	3
L-15009	22.0	65	2.5	3
L-15010	12.6	33	4.0	3
L-15011	6.7	17	6.4	3
L-15012	62.0	180	1.6	4
L-15013	36.0	90	2.5	4
L-15014	22.0	46	4.0	4
L-15015	12.7	24	6.4	4

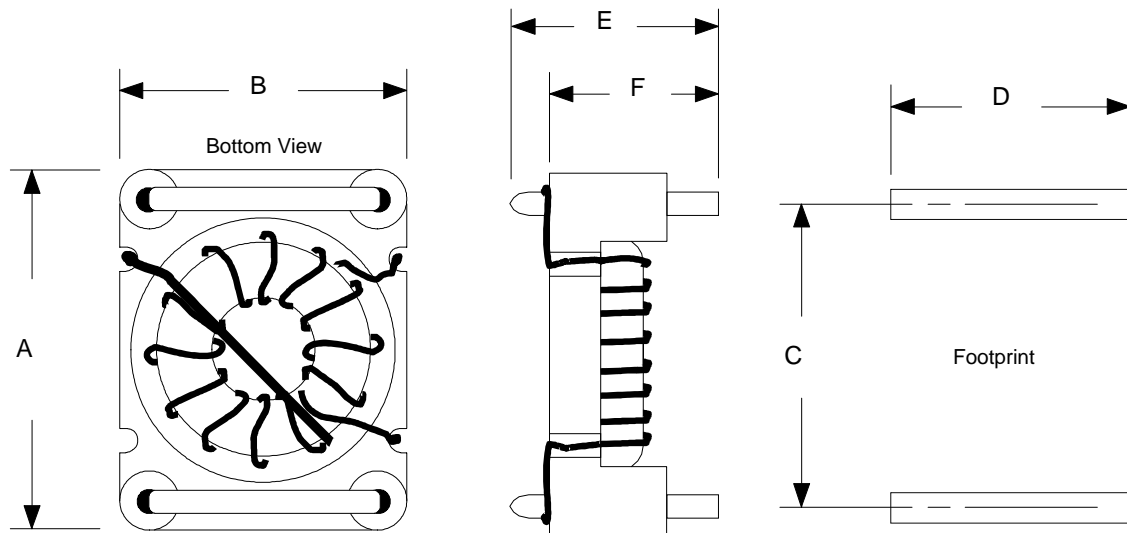

*Tape & Reel  
Available*

Package Dimensions in Inches

Size Code	A Max.	B Max.	C ± .005	D ± .005	E Max.	F ± .010
1	0.400	0.350	0.300	0.245	0.250	0.190
2	0.485	0.430	0.375	0.320	0.330	0.275
3	0.625	0.525	0.500	0.400	0.400	0.315
4	0.725	0.575	0.600	0.450	0.410	0.325

Specifications are subject to change without notice

SM-L 5/97