


ISDN S-Interface Applications Transformers - EP Style

Designed to meet pulse waveform template of CCITT I.430 when using proper chip pair.


Electrical Specifications ^{1,2,3} at 25°C

Part Number	Turns Ratio ($\pm 5\%$)	OCL min. (mH)	PRI-SEC C_{wv} max. (pF)	Leakage Ind. max. (μ H)	Primary DCR max. (Ω)	Secondary DCR max. (Ω)	Style & Schem.	Primary Pins
T-13700	1CT:2CT	30	50	13	1.1	2.6	EP13 - A	1-5
T-13701	1CT:1CT	30	50	15	1.1	1.3	EP13 - A	1-5
T-13702	1CT:2.5CT	30	50	13	1.1	4.2	EP13 - A	1-5
T-13703	1CT:1.8CT	30	50	13	1.2	2.6	EP13 - A	1-5
T-13704	1CT:2CT	30	50	10	1.0	2.0	EP13 - A	1-5
T-13705	1CT:1CT	30	50	10	2.2	2.2	EP13 - A	1-5
T-13706	1CT:1CT	22	95	5	2.5	2.5	EP10 - B	1-3
T-13707 ⁽¹⁾	2:1CT	22	100	15	5.5	5.0	EP7 - C	1-3


1. Hi-pot (Pri. to Sec.) 2000 V_{RMS} except T-13707. Isolation is 1000 V_{RMS}
2. ET-Product of 10 V- μ sec min.
3. OCL Measured at Primary @ 10KHz & 700mV

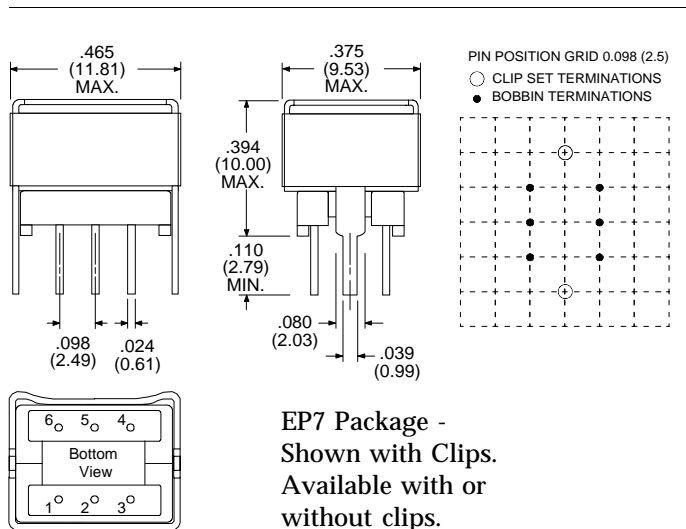

Schematic "A"



Schematic "B"



Schematic "C"

