

Digital Audio Data Transmission Transformer

(For Use with Crystal Semiconductor's CS8401, CS8402)

Turns Ratio (± 5%)	1 : 1
----------------------	-------

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	2.0	3.0	mHy
Leakage Inductance		0.50	μHy
Rise Time		25	nSec
DC Resistance		0.7	ohms
Isolation (HI-POT)	2.0		KV _{RMS}
ET Product	20		VμS
Common Mode Rejection (@ 1MHz in 100 Ω System)	70		dB
Return Loss (100kHz - 10MHz)	22		dB
3 dB bandwidth 100kHz to 10 MHz typical			
TEST CONDITIONS: Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz			

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Operating Temperature:
0°C to +70°C

Parts shipped in anti-static tubes. 44 pieces per tube


Tape & Reel Available

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

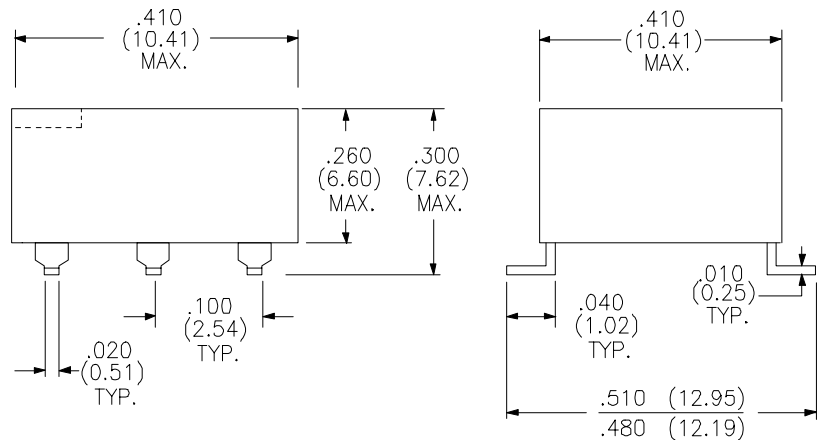

SCHEMATIC DIAGRAM:

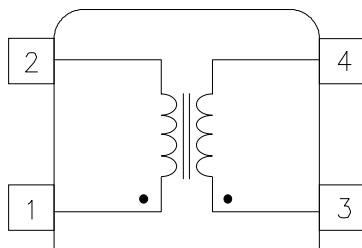

Note: Unused Pins omitted

RHOMBUS INDUSTRIES INC.

FSCM NO. 16714

RHOMBUS P/N: T-10347

CUST P/N:

NAME:

DATE: 10/12/96

SHEET: 1 OF 1