


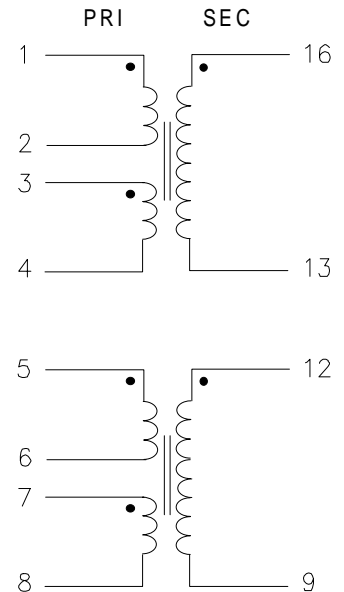
# ISDN S-Interface Dual Transformer Compatible With AT&T T7256

UL 1459 Recognized 

Turns Ratio Pins 1-4:16-13 & 5-8:12-9	1:2.5 & 1:2.5
---------------------------------------	---------------

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance 1-4 <sup>(1)</sup> 5-8 <sup>(2)</sup>	22		mHy
Leakage Inductance 1-4 <sup>(1)</sup> Short 16-13 5-8 <sup>(2)</sup> Short 12-9		4 4	$\mu$ Hy $\mu$ Hy
Interwinding Capacitance ( $C_{ww}$ ) 1-4 <sup>(1)</sup> & 16-13 <sup>(3)</sup> 5-8 <sup>(2)</sup> & 12-9 <sup>(4)</sup>		100 100	pF pF
Distributed Parallel Capacitance 1-4 <sup>(1)</sup> 5-8 <sup>(2)</sup>		180 100	pF pF
Primary DC Resistance: 1-4 <sup>(1)</sup> ; 5-8 <sup>(2)</sup>		2.30	ohms
Secondary DC Resistance: 16-13 ; 12-9		5.80	ohms
Isolation (HI-POT)	2400		V <sub>RMS</sub>

## SCHEMATIC DIAGRAM



MEETS THE PULSE WAVEFORM  
TEMPLATE OF CCITT I.430.

Primary is Line Side


Unbalanced current at TE:  $\Delta I_{dc} = 1 \text{ mA max.}$

Longitudinal Conversion Loss - 10KHz to 300  
KHz: 60dB min.

Flammability: Materials used in the  
production of these units are UL94-VO  
and meet requirements of IEC 695-2-2  
needle flame test.

Parts shipped in anti-static  
tubes. 18 pieces per tube

## Physical Dimensions in inches (mm)

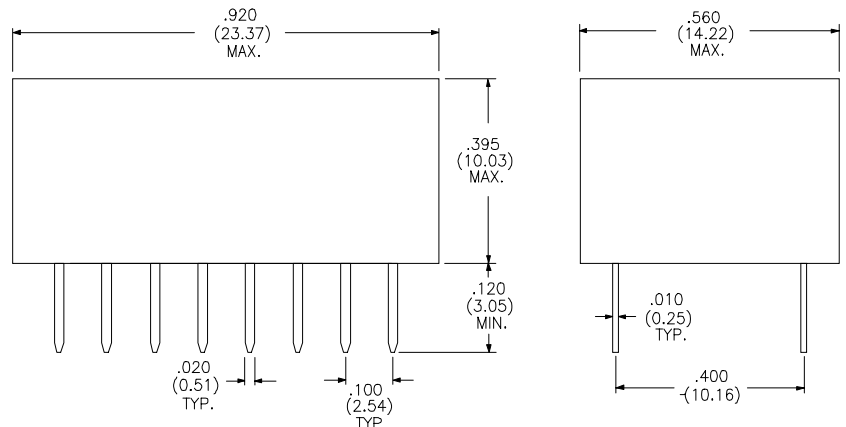

Oscillation Voltage = 500mV  
Oscillation Frequency = 10.0 KHz

1. Connect 2 & 3
2. Connect 6 & 7

RHOMBUS P/N: **T-10506**

CUST P/N:

NAME:

DATE: **3/24/94**

SHEET: 1 OF 1