


ISDN S-Interface Dual Transformer Reinforced Insulation Per EN 41003/EN 60950

Turns Ratio Pins 1-4:16-13 & 5-8:12-9	1:2.5 & 1:2.5
---------------------------------------	---------------

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance 1-4 ⁽¹⁾ 5-8 ⁽²⁾	22		mHy
Leakage Inductance 1-4 ⁽¹⁾ Short 16-13 ⁽³⁾ 5-8 ⁽²⁾ Short 12-9 ⁽⁴⁾		15-40 15-40	μ Hy μ F
Interwinding Capacitance ($C_{W/W}$) 1-4 ⁽¹⁾ & 16-13 ⁽³⁾ 5-8 ⁽²⁾ & 12-9 ⁽⁴⁾		100 100	pF pF
Distributed Parallel Capacitance 1-4 ⁽¹⁾ 5-8 ⁽²⁾		110 110	pF pF
Primary DC Resistance: 1-4 ⁽¹⁾ ; 5-8 ⁽²⁾	2.12	2.87	ohms
Secondary DC Resistance: 16-13 ⁽³⁾ ; 12-9 ⁽⁴⁾	4.93	6.67	ohms
Isolation (HI-POT)	4000		V_{RMS}

SCHEMATIC DIAGRAM

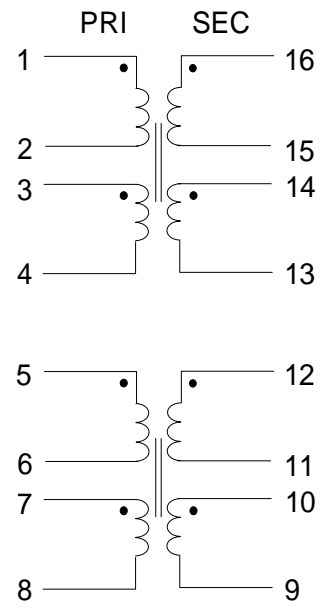

MEETS THE PULSE WAVEFORM
TEMPLATE OF CCITT I.430.

Primary is Line Side


Unbalanced current at TE: $\Delta I_{dc} = 1$ mA max.

Longitudinal Conversion Loss - 10KHz to 300
KHz: 60dB min.

Flammability: Materials used in the
production of these units are UL94-VO
and meet requirements of IEC 695-2-2
needle flame test.

Parts shipped in anti-static
tubes. 18 pieces per tube

Physical Dimensions in inches (mm)

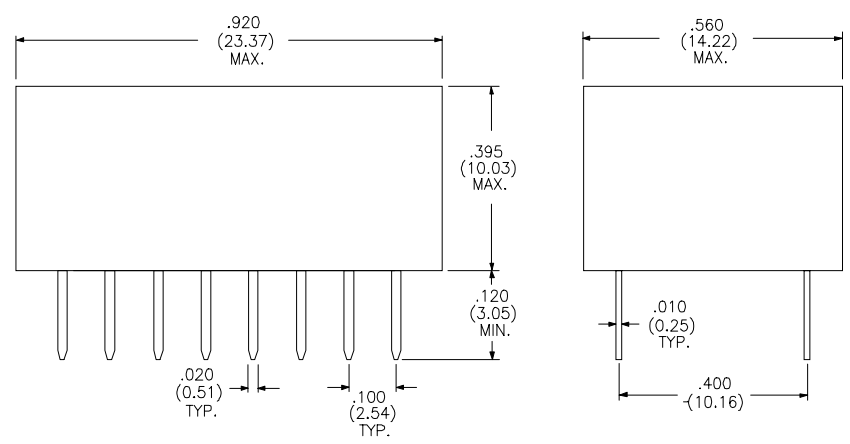

- Oscillation Voltage = 700mV
Oscillation Frequency = 10.0 KHz
1. Connect Pins 2 & 3
 2. Connect Pins 6 & 7
 3. Connect Pins 14 & 15
 4. Connect Pins 10 & 11

RHOMBUS P/N: T-10554	
CUST P/N:	NAME:
DATE: 3/24/94	SHEET: 1 OF 1