

*T3 DUAL INTERFACE TRANSFORMER

Turns Ratio (± 3%)	1:1.73CT & 1:1.73CT
----------------------	---------------------

PARAMETER	MIN.	MAX.	UNITS
Inductance	50		μHy
Rise Time		3.00	nS
Leakage Inductance		0.10	μHy
Capacitance (C _{ww})		12	pF
Primary DC Resistance		0.2	ohms
Isolation	1500		VRMS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Temperature Characteristics TX:
 -40° C 30 μH min. (40% drop in inductance)
 +85° C 70 μH min. (40% growth in inductance)
 Typical part: TX Side
 67.5 μH @ +25° C
 97.5 μH @ +85° C
 38.5 μH @ -40° C

Parts shipped in anti-static tubes. 33 pieces per tube


Operating Temperature range: -40°C to +85°C

3 dB Bandwidth is .200 - 340 (MHz) typical, tested in a 75 ohm system


Tape & Reel Available

*Also suitable for DS3, E3 and STS-1 interfaces

PHYSICAL DIMENSIONS All dimensions in inches (mm):

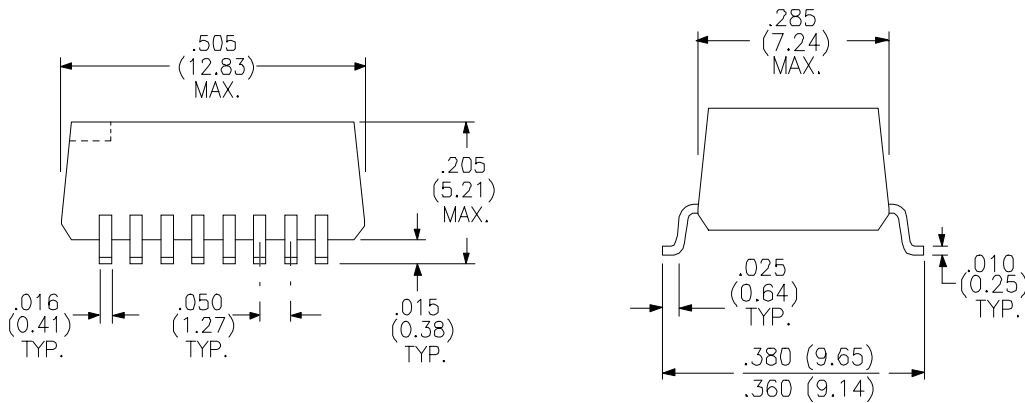

SCHEMATIC DIAGRAM:

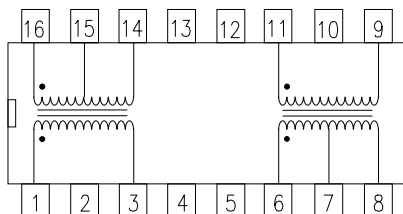

RHOMBUS INDUSTRIES INC. **FSCM NO. 16714**

RHOMBUS P/N: **T-15106**

CUST P/N:

NAME:

DATE: **9/23/97**

SHEET: 1 OF 1